


CORSAR FIX

UN ECE R44.04

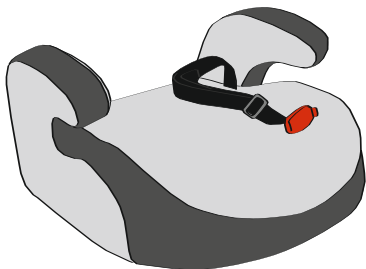

NOTICE: This is a "Universal" child restraint. It is approved according to Regulation No. 44, 04 series of amendments, for general use in vehicles. It will fit most, but not all, car seats.

A correct fit is likely if the vehicle manufacturer has declared in the vehicle handbook that the vehicle is capable of accepting a "Universal" child restraint, for this age group.

This child restraint has been classified as "Universal", under more stringent conditions than those which applied to earlier designs, which do not carry this notice.

If in doubt, consult either the child restraint manufacturer, or the retailer.


This child restraint is only suitable for use in approved vehicles equipped with 3-point/static/with retractor safety belts, approved in compliance with UNECE R16 or other equivalent standards.

Please keep the booster seat installation manual during the lifetime of the device.

IMPORTANT!


Please observe the following safety notes:

1. Strictly follow the installation manual provided by the child restraint manufacturer. Read it carefully before using it for the first time.
2. Safety can only be ensured if the booster seat is installed correctly in accordance with the instructions described in this manual.
3. Do not use the child restraint without the cover.
4. Replace the seat cover only with the one recommended by the manufacturer, because the cover is an integral part of the safety system.
5. Do not use any load-bearing contact points, other than those described in the instructions, and marked on the child restraint.
6. Do not drive the car with your child unbelted in the booster seat. Remember that most car accidents occur on short-distance trips, or close to home.
7. Do not leave your child unattended in the child restraint.
8. Always ensure that the booster seat is secured in the vehicle, even when not in use.
9. Do not use the child restraint if it has been violently impacted by a car accident.
10. Any luggage or loose objects that can cause injury in the event of an accident must be secured in the car.
11. The hard items and the plastic parts of the booster seat must be located and installed properly during everyday use of the vehicle, to avoid being trapped by a movable seat, or by a vehicle door.
12. Protect the uncovered parts of the seat against direct sunlight, as they can become extremely hot, and harm your child's skin.
13. Any alterations or additions to this child restraint without the consent of a competent authority, as well as not closely following the installation manual provided by the booster seat manufacturer are **DANGEROUS!**
14. All parts of the seat can be cleaned with gentle cleaners. The seat cover can be washed at 30° C.
15. If you have any questions or doubts concerning the use of your booster seat, please consult the manufacturer.
16. Warm up the car interior, before placing your child into the car seat. It will increase the safety of your child restraint.
17. You should take off your child's bulky overclothes before securing him/her in the child restraint. Do not exceed the weight limit of your booster seat group.



The child restraint must be installed on a vehicle seat equipped with 3-point seat belts.

To secure the booster seat, and to prevent it from becoming loose, you can additionally fasten it using FIX anchors, but only if your vehicle is equipped with the ISOFIX anchoring system. In this case your child should wear a vehicle 3-point passenger seat belt.

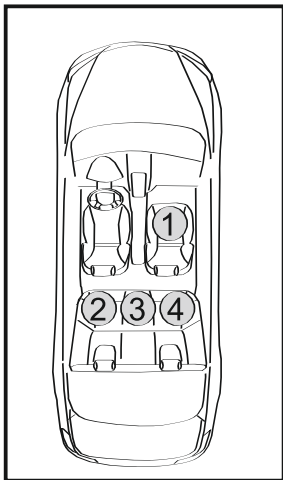

● Installation of the booster seat in the vehicle:

1,2,3,4 – forward-facing installation only

1 – if the car has a front passenger airbag, turn it off. Then slide the vehicle seat backwards, to fix the upper point of the vehicle 3-point seat belt anchor, on the same level as the booster seat, or behind it.



Follow the booster seat installation instructions specified in the owner's manual for your vehicle.




Some parts of the booster seat may differ from those given in this manual, as the manufacturer may make minor modifications and improvements.

GROUP III (from 22 to 36 kg)

1.1 Booster Seat Installation.

The booster seat can be additionally fastened with FIX anchors (ref. par.1.2).



- Place the booster seat on the vehicle seat facing forward.

Make sure that the booster seat is free of toys, or other foreign objects, and that it fits the vehicle seat-back tightly.

- ⚠ All insertion points for the vehicle seat belts are marked in red on the booster seat.

- Pass the lap belt of the vehicle 3-point passenger seat belt through the armrest.


Place the child into the booster seat, and fasten him/her with the vehicle 3-point passenger seat belt, in accordance with par. 1.3.

1.2 Fastening the Booster Seat Using FIX Anchors.




- Before installing the booster seat, make sure that the chosen vehicle seat has the lower anchors of the ISOFIX anchoring system.

⚠ Information on the availability and location of ISOFIX anchorage points is given in the owner's manual for your vehicle.




- The ISOFIX lower anchors are two anchorage points on the vehicle seat (in the joint between the seat back and the seat cushion).




- To fasten the booster seat, unfold the FIX anchor from the transport position, by pulling it by both locking arms out of the lock. Make sure that the indicators located on the outer lateral sides of the locking arms light up in red.


If not, push the red button located on the inner side of the locking arm, the indicator must turn red.




- Clamp the special insertion aids (if included in the package) on the ISOFIX anchorage points located in the vehicle. These insertion aids facilitate the booster seat installation.




- Place the booster seat on the vehicle seat, positioning the locking arms right in front of the ISOFIX anchorage points (insertion aids).




- Push the booster seat towards the seat back, until it clicks into place. Check that the indicators located on the outer lateral sides of the locking arms change color from red to green.



- If you can not see the indicators behind the soft vehicle seat cover, or the booster seat cover (and in other cases), slightly raise the child car seat.

 Pull the booster seat from the seat back, then swing it to the left and to the right. It must stay securely in its position.

The booster seat is now fastened!



- To remove the booster seat from the vehicle seat, unfasten the FIX anchor, pushing the red buttons located on the inner lateral parts of the locking arms.

1.3 Buckling in Your Child.



- Place the child into the booster seat, and fasten him/her with the vehicle 3-point passenger seat belt. The upper part of the diagonal strap must rest on the child's shoulder. The lower part of the diagonal strap must be over the armrest, with the lap belt running under both armrests of the booster seat.

If the diagonal strap of the vehicle 3-point passenger seat belt runs across the child's neck, install the guide strap on the side of the child's shoulder, where the upper part of the diagonal strap of the vehicle seat belt runs.




- To install the guide strap, push the clip through the corresponding slot in the cover, and then into the slot in the seat. Turn it sideways to fasten it.

Pass the guide strap behind the child's back, and adjust the height.

Use the plastic clamp on the guide strap to fasten the diagonal strap to the vehicle's 3-point passenger seat belt, just over the child's shoulder.

- The guide strap removal is carried out in reverse order.



Make sure that the vehicle seat belt buckle is not fixed too high, and is not bumping against the armrest of the booster seat. Otherwise, use another vehicle seat to install the booster seat. If in doubt, please consult the booster seat manufacturer.



The lap belt must be adjusted as low as possible across the pelvis, and not on the child's belly.



The diagonal strap of the seat belt MUST NOT run across the child's neck!



The seat belt must be tightly adjusted. Do not twist the seat belt.

- To release the child, unfasten the seat belt as usual.

WASHING AND CLEANING

Do not machine wash the cover. Do not use abrasive detergents. The water temperature should not exceed 30° C.

Clean the plastic parts with solvent free and non-abrasive polish.



All passengers should know how to release the child from the booster seat, in the event of an accident.



To avoid injuring the child secured in the booster seat, in the event of an accident, make sure that all passengers in the vehicle have their seat belts appropriately fastened.

PLEASE KEEP THE WARRANTY CARD!

FOR NOTES

A large rectangular area with rounded corners, containing 20 horizontal lines for writing notes. The lines are evenly spaced and extend across the width of the page, leaving a small margin at the top and bottom. The entire area is enclosed in a thin black border.

BABYlion