


MAGNET

UN ECE R44.04

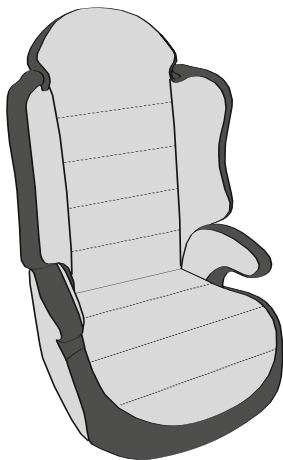

NOTICE: This is a "Universal" child restraint. It is approved according to Regulation No. 44, 04 series of amendments, for general use in vehicles. It will fit most, but not all, car seats.

A correct fit is likely if the vehicle manufacturer has declared in the vehicle handbook that the vehicle is capable of accepting a "Universal" child restraint, for this age group.

This child restraint has been classified as "Universal", under more stringent conditions than those which applied to earlier designs, which do not carry this notice.

If in doubt, consult either the child restraint manufacturer, or the retailer.

This child restraint is only suitable for use in approved vehicles equipped with 3-point/static/with retractor safety belts, approved in compliance with UNECE R16 or other equivalent standards.

Please keep the child car seat installation manual during the lifetime of the device.


IMPORTANT!

Please observe the following safety notes:


1. Strictly follow the installation manual provided by the child restraint manufacturer. Read it carefully before using it for the first time.
2. Safety can only be ensured if the booster seat is installed correctly in accordance with the instructions described in this manual.
3. Do not use the child restraint without the cover.
4. Replace the seat cover only with the one recommended by the manufacturer, because the cover is an integral part of the safety system.
5. Do not use any load bearing contact points, other than those described in the instructions and marked on the child restraint.
6. Do not drive the car with your child unbelted in the booster seat. Remember that most car accidents occur on short distances or close to home.
7. Do not leave your child unattended in the child restraint.
8. Always ensure that the booster seat is secured in the vehicle, even when not in use.
9. Do not use the child restraint if it has been violently impacted by a car accident.
10. Any luggage or loose objects that can cause injury in the event of an accident must be secured in the car.
11. The hard items and the plastic parts of the booster seat must be located and installed properly during everyday use of the vehicle, to avoid being trapped by a movable seat or by a vehicle door.
12. Protect the uncovered parts of the seat against direct sunlight, as they can become extremely hot, and hurt your child's skin.
13. Any alterations or additions to this child restraint without the consent of a competent authority, as well as not closely following the installation manual provided by the booster seat manufacturer are **DANGEROUS!**
14. All parts of the seat can be cleaned with gentle cleaners. The seat cover can be washed at 30° C.
15. If you have any questions or doubts concerning the use of your booster seat, please consult the manufacturer.
16. Place your child into a warm car only to increase the safety of your child restraint.
17. You should take off your child's bulky overclothes before securing him/her in the child restraint. Do not exceed the weight limit of your booster seat group.



The child restraint must be installed on a vehicle seat equipped with 3-point seat belts.



To install using a vehicle 3-point passenger seat belt, you must check that the upper point of the seat belt anchor is on the same level as the child car seat, or behind it.

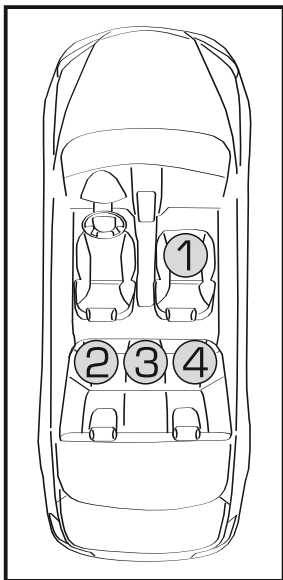

● Installation of the child car seat in the vehicle:

1,2,3,4 – forward-facing installation only.

1 – if the car has a front passenger airbag, turn it off. Then slide the vehicle seat backwards, to fix the upper point of the vehicle 3-point seat belt anchor, on the same level as the child car seat, or behind it.




Follow the child car seat installation instructions specified in the owner's manual for your vehicle.



Some parts of the child car seat may differ from those given in this manual, as the manufacturer may make minor modifications and improvements.

GROUP II (from 15 to 25 kg)

1.1 Child Car Seat Installation and Buckling in Your Child.



- Place the child car seat on the vehicle seat facing forward.

Make sure that the child car seat is free of toys, or other foreign objects, and that it fits the vehicle seat-back tightly.




All insertion points for the vehicle seat belts are marked in red on the child car seat.

- Pass the lap belt of the vehicle 3-point passenger seat belt through the armrest, and direct the diagonal strap through the slot on the top of the seat-back.



- Place the child into the child car seat, and fasten him/her with a vehicle 3-point passenger seat belt. The upper part of the diagonal strap must rest on the child's shoulder. The lower part of the diagonal strap must be over the armrest, with the lap belt running under both armrests of the child car seat.



Make sure that the vehicle seat belt buckle is not fixed too high, and is not bumping against the armrest of the child car seat. Otherwise, use another vehicle seat to install the child car seat. If in doubt, please consult the child car seat manufacturer.



The lap belt must be adjusted as low as possible across the pelvis, and not on the child's belly.



The diagonal strap of the seat belt **MUST NOT** run across the child's neck!




The seat belt must be tightly adjusted. Do not twist the seat belt.

- To release the child, unfasten the seat belt as usual.


GROUP III (from 22 to 36 kg)

2.1 Seat-back Removal.



- Pull the seat-back out slightly, and unfold it. Pull the seat-back anchor guides out of the grooves in the seat.

2.2 Booster Seat Installation and Buckling in Your Child.



- Place the booster seat on the vehicle seat facing forward.

Make sure that the booster seat is free of toys, or other foreign objects, and that it fits the vehicle seat-back tightly.

- ⚠ All insertion points for the vehicle seat belts are marked in red on the booster seat.

- Pass the lap belt of the vehicle 3-point passenger seat belt through the armrest.



- Place the child into the booster seat, and fasten him/her with a vehicle 3-point passenger seat belt. The upper part of the diagonal strap must rest on the child's shoulder. The lower part of the diagonal strap must be over the armrest, with the lap belt running under both armrests of the booster seat.

If the diagonal strap of the vehicle 3-point passenger seat belt runs across the child's neck, install the guide strap on the side of the child's shoulder, where the upper part of the diagonal strap of the vehicle seat belt runs.




- To install the guide strap, push the clip through the corresponding slot in the cover, and then into the slot in the seat. Turn it sideways to fasten it.

Pass the guide strap behind the child's back, and adjust the height.

Use the plastic clamp on the guide strap to fasten the diagonal strap to the vehicle's 3-point passenger seat belt, just over the child's shoulder.

- The guide strap removal is carried out in reverse order.



Make sure that the vehicle seat belt buckle is not fixed too high, and is not bumping against the armrest of the booster seat. Otherwise, use another vehicle seat to install the booster seat. If in doubt, please consult the child car seat manufacturer.



The lap belt must be adjusted as low as possible across the pelvis, and not on the child's belly.



The diagonal strap of the seat belt **MUST NOT** run across the child's neck!



The seat belt must be tightly adjusted. Do not twist the seat belt.

- To release the child, unfasten the seat belt as normal.

WASHING AND CLEANING

Do not machine wash the cover. Do not use abrasive detergents. The water temperature should not exceed 30° C.

Clean the plastic parts with solvent free and non-abrasive polish.



All passengers should know how to release the child from the booster seat, in the event of an accident.



To avoid injuring the child secured in the booster seat, in the event of an accident, make sure that all passengers in the vehicle have their seat belts appropriately fastened.

PLEASE KEEP THE WARRANTY CARD!

FOR NOTES

A large rectangular area with rounded corners, containing 20 horizontal lines for writing notes. The lines are evenly spaced and extend across the width of the page, leaving a small margin from the right edge. The top and bottom corners of the area are rounded.

BABYLON